

# Alpha Compact G3-WRAP

## Label Applicator



## Economical automatic wrap-around labeling system.

### Reliable Design

Weber's Alpha Compact G3-WRAP is a collaboration with RL Craig Inc known for their quality & reliability. This solution presents a fully integrated economical system for wrap-around labeling of straight-walled products like bottles and cans.

### Versatile Labeling

This system applies labels up to 4.5" wide (120mm unit) or 6.0" wide (150mm unit) and up to 11.8" long at speeds up to 60 feet per minute with a dispensing tolerance of  $\pm 0.03$ ".

The Alpha Compact G3-Wrap is a perfect low-cost addition to breweries, canners and bottling companies. An optional Markoprint inkjet coder can be added to print date codes in line with the label application. To accommodate various production environments, the system can be specified in right-hand or left-hand configurations.

### Special Features

- Alpha Compact G3 with 7" color touch display
- Applies labels up to 6.0" wide and up to 11.8" long\*
- Height adjustable RL Craig conveyor belt (30"-36")
- Operates at speeds up to 60 feet/minute\*
- Applies labels to the sides of round products
- Accurate labeling to within  $\pm 0.03$ "

\*Requires 150mm wide unit



**Weber**<sup>®</sup>  
Packaging Solutions

# Alpha Compact G3-WRAP *General Specifications*

## Dimensions L-W-H (120mm model)

72" x 40" x 33" +/- 3"  
(1829 mm x 1016 mm x 838 mm)

## Conveyor Belt Width

6" (152.4mm)

## Weight (120mm model)

Approx 350 lbs. (158kg)  
Without labels

## Electrical

120 VAC, 60Hz, 380W

## Label Applicator

Alpha Compact G3 (120 mm)  
Alpha Compact G3 (150 mm) Optional

## Label Roll Size

Up to 12" O.D. (300mm) 3" (76mm) core  
Outside wound

## Standard Label Sizes

4.5" wide (120mm unit) or 6.0" wide (150mm unit)  
and up to 11.8"

## Label Styling

Die-cut, waste-removed with a minimum of 0.125"  
(3mm) separation between labels in running direction

## Label Placement

Accurate to  $\pm 0.03$ " (0.8mm) when labels are produced  
to specifications and product handling is controlled

## Maximum Dispensing Speed


Up to 120 fpm (36.6m)

## Maximum Conveyor Speed

Up to 60 fpm (18.3m)

## Options

- Markoprint Inkjet
- Clear label sensor

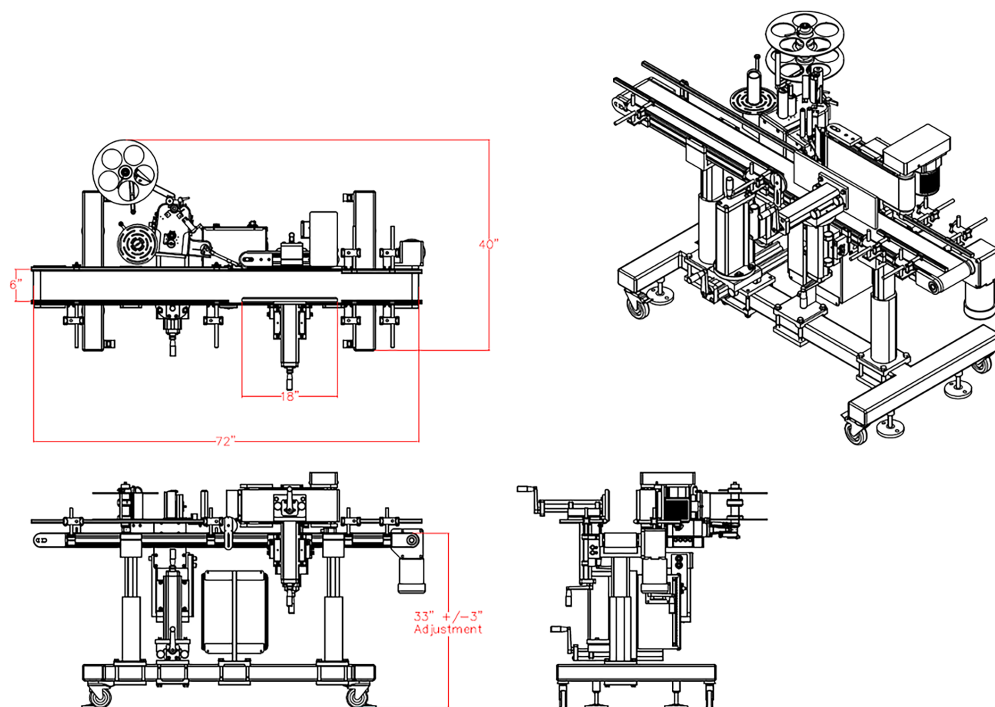

## Touch Display Interface

The 7" Touch Display for the Alpha Compact G3 features rugged aluminum construction, single-key calibration, automatic recognition of missing labels, in-production speed adjustment, and more.



\*Label size and stroke length dependent